



PLATFORM SAFETY SHOWERS EYEWASH STATIONS



**FASTEST
WASHDOWN
COVERAGE**

**ANSI
APPROVED**

**ERGONOMIC
EASY-TO-USE
DESIGN**



Combination Drench Shower and Halo™ Eyewash Station

With a Variety of eye / face washdown bowl and safety shower options we can find the perfect combination to fit your drench shower needs. Our portable eyewash station is offered with mounting brackets to easily fit within your existing platform system and provide a wash station near the source of potential hazards.

ANSI guidelines state that an Eye Wash/Drench Showers need to be located 10 seconds or 55' (16.8m) from contaminants or hazardous materials. Eye wash stations need to be on the same horizontal plane with no obstructions.

Standard Combination Drench Shower/Eyewash Units save space and fit easily into any work environment. Shower valve operates quickly by a pull rod with a triangular handle. Shower provides a superior washdown with a more even spray pattern. Halo eyewash, operated by an ergonomic, highly visible push handle, provides effective wash down coverage and spray pattern. Integral strainer reduces debris in the water and also prevents clogging.


Features

- Halo™ and SpinTec™ Deliver the Most Effective Shower and Eye/Face Washdown
- Exceeds ANSI/ISEA Z358.1 Specifications
- Industry's Only Self-Draining Design – The Aquaduct™
- Separate Supply and Waste Pipes – Meets CEN and Plumbing Requirements
- Ergonomic Hand Activation Eyewash Paddle – Easy to Reach from Any Direction
- Fully-Assembled and Factory-Tested Eyewash or Eye/Face Wash with Hinged Dust Covers
- Yellow Transparent Plastic and Stainless Steel Bowl Covers Available

COMBINATION DRENCH SHOWER AND EYEWASH STATION

HALO Eyewash Bowl

The Halo eyewash system offers a high performance rinsing platform that provides rapid relief to an individual's eyes that have been injured by chemicals or particulate. The eyewash includes an integral 5.1 GPM (19.2 L) flow control, providing water at a safe velocity while maintaining its effectiveness (exceeds minimum water flow of 0.4 GPM (1.5 L) at 30 PSI (2.0 bar)).

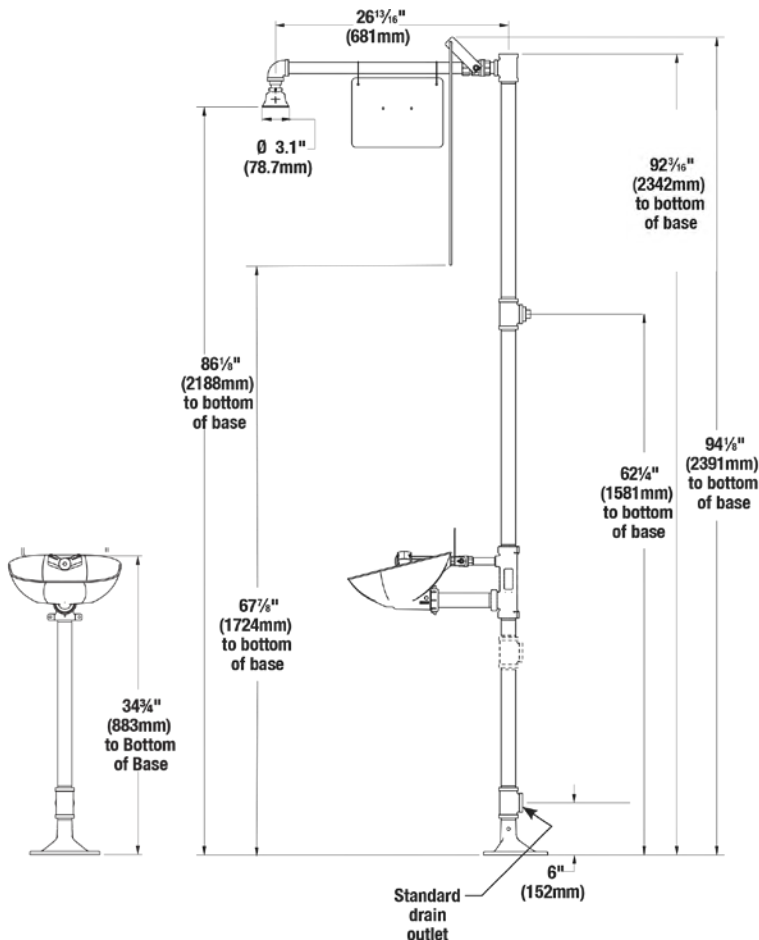

SpinTec™ Showerhead

Standard showerhead is 3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic or optional 10³/₄" (273mm) diameter corrosion-resistant stainless steel shroud (S19314F). SpinTec drench showerhead features integral 22 GPM (83.3 L) flow control (exceeds minimum water flow of 20 GPM (75.7L) at 30 PSI (2.0 bar)), conserving water and helping to accurately size your tepid water system.



Heat Trace Shower

Tempered Water Solutions for safety eye/face washes and drench showers ensure that, in an emergency, your employees will be comfortable during the 15 minute flush of tepid water required by ANSI Z358.1. Consumes energy vs. use energy, no need to worry about hypothermia from freezing cold water or being scalded by water that is too hot. Use energy only while the unit is in use – it's unnecessary to keep a water tank heated 24/7. Easy to install – just add water and power – only requirements are one electrical connection and a cold water line. Quality is unmatched with premium features that come standard and exceed the specifications of any application.

